

FEATURES

- Minimum operating pressure differential ΔP 0.3/0.5 bar
- Two way valves for automatic control of water, air and inert gas and other gases/liquids compatible with the sealing materials used
- Interchangeability of magnetic heads, AC and DC
- The solenoid valves satisfy all relevant EC Directives

GENERAL

Differential pressure	See «SPECIFICATIONS» [1 bar = 100 kPa]						
Ambient temperature range	-10°C to +60°C						
Maximum viscosity	40 cSt (mm²/s)						
Response time	3/8	1/2	3/4	1	1 1/4	1 1/2	2
opening time (ms)	25	30	55	70	300	300	1500
closing time (ms)	40	90	110	200	1000	1000	2000

Fluids (*)	Temperature Ranges (TS)	Sealings (*)
DN ≤ 25: air, inert gas and water DN > 25: air and water	-10°C to +85°C	NBR (nitrile) FPM (fluoroelastomer)

MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified

Body	Brass
Internal parts	Stainless steel and brass
Springs	Stainless steel
Diaphragm & valve disc	NBR
Seals and pilot disc	FPM (3/8 to 1), NBR (1 1/4 to 2)
Shading coil	Copper

ELECTRICAL CHARACTERISTICS

Coil insulation class	F
Connector	Spade plug (cable Ø 6-8 mm or Ø 6-10 mm)

Connector specification

for power coil: 4 W/6,9 W	DIN 43650, 11 mm, industry standard B
for power coil: 5W/6,9W-8W/9W	ISO 4400 / EN 175301-803, form A

Electrical safety

Electrical enclosure protection Moulded IP65 (EN 60529)

Standard voltages


(Other voltages and 60 Hz on request) DC (-) : 24V - 48V
AC (-) : 24V - 48V - 115V - 230V / 50 Hz

Prefix Option	Power Ratings				Operator Ambient Temperature Range (TS) (C°)	Replacement Coil		Type ⁽¹⁾
	Inrush ~	Holding ~	Hot/Cold =			~	=	
	(VA)	(VA)	(W)	(W)		230 V/50 Hz	24 VDC	
SC	12	6	4	5/6.9	-10 to +60	400127-197	400127-142	01
	10.4	6	5	5/6.9	-10 to +60	400727-117	400727-185	02
	23	14	8	7.5/9	-10 to +50	511239-009	511239-002	03
	28	20	12.5	7.5/9	-10 to +50	500705-004	511239-002	03

⁽¹⁾ Refer to the dimensional drawings on the following page.

SPECIFICATIONS

Pipe Size	Orifice Size	Flow Coefficient Kv		Operating Pressure Differential (bar)			Power Coil (W)		Catalog Number	Options		
				Min.	Max. (PS)					Maintained Man. Operator	FPM	EPDM
					Air / Water (*)							
	(mm)	(m³/h)	(l/min)	~	=	~	=	~/=				
NC - Normally Closed												
G* 3/8	12	2.4	40	0.3	10	10	4	6.9	SCE238D001	MO	V	E
					16	16	5	6.9	SCE238D006	MO	V	E
G* 1/2	12	2.4	40	0.3	10	10	4	6.9	SCE238D002	MO	V	E
					16	16	5	6.9	SCE238D007	MO	V	E
	15	4.2	70	0.3	10	10	4	6.9	SCE238D003	MO	V	E
					16	16	5	6.9	SCE238D008	MO	V	E
G* 3/4	20	6.6	110	0.3	10	10	4	6.9	SCE238D004	MO	V	E
					16	16	5	6.9	SCE238D009	MO	V	E
G* 1	25	9.9	165	0.3	10	10	4	6.9	SCE238D005	MO	V	E
					16	16	5	6.9	SCE238D010	MO	V	E
G 1 1/4	30	15	250	0.5	10	10	8	9	SCG238F016	MO	V	-
G 1 1/2	45	27	450	0.5	10	10	8	9	SCG238F017	MO	V	-
G 2	45	34	566	0.5	10	10	8	9	SCG238F018	MO	V	-

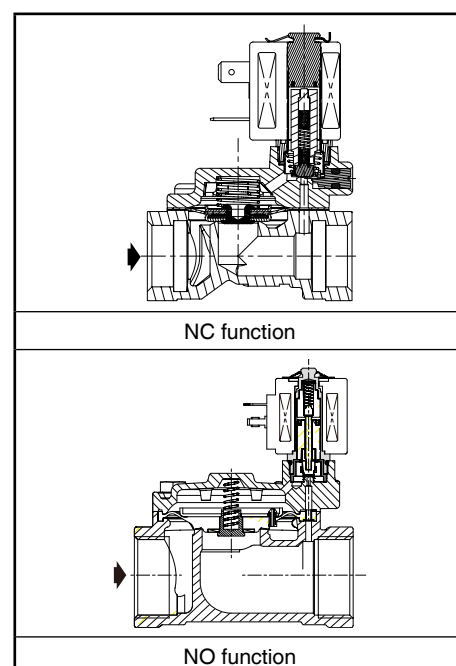

SPECIFICATIONS

Pipe Size	Orifice Size	Flow Coefficient Kv		Operating Pressure Differential (bar)			Power Coil (W)		Catalog Number	Options		
				Min.	Max. (PS)					Maintained Man. Operator	FPM	EPDM
	Air / Water (*)											
	(mm)	(m³/h)	(l/min)		~	=	~	=	~/=			
NO - Normally Open												
3/8	13.5	1.68	28	0.35	12	12	5	6.9	SCG238D414	-	V	-
1/2	13.5	2.1	35	0.35	12	12	5	6.9	SCG238D415	-	V	-
3/4	18	4.98	83	0.35	12	12	5	6.9	SCG238D416	-	V	-
1	24	10.98	183	0.35	12	12	5	6.9	SCG238D417	-	V	-
G 1 1/4	30	15	250	0.5	10	10	12.5	9	SCG238F019	-	V	-
G 1 1/2	45	27	450	0.5	9	9	12.5	9	SCG238F020	-	V	-
G 2	45	34	566	0.5	9	9	12.5	9	SCG238F021	-	V	-


OPTIONS

- Valves can also be supplied with FPM (fluorelastomer), EPDM (ethylene-propylene) seals, diaphragm and disc. Use the appropriate optional suffix letter for identification
- Oxygen service, suffix NV, example: SCE238C002NVMO (Except pipe size G 1 1/4, G 1 1/2 and G 2)
- Plug with visual indication and peak voltage suppression or with cable length of 2 m (see Solenoids, Coils & Accessories section)

INSTALLATION

- The solenoid valves can be mounted in any position without affecting operation
- Pipe connections (G*) have standard combination thread according to ISO 228/1 and ISO 7/1. Pipe connections (G) have standard combination thread according to ISO 228/1
- Installation/maintenance instructions are included with each valve
- Spare parts kits and replacement coils are available
- Other pipe connections are available on request

SPARE PARTS KIT

Catalog Number	Spare Parts Kit Number ⁽²⁾	
		
	~/=	~/=
SCE238D001/002/006/007	C131600	C140262V
SCE238D003/D008	C131618	C140262V
SCE238D004/D009	C131606	C140262V
SCE238D005/D010	C131609	C140262V

⁽²⁾ Standard suffixes are also applicable to kits.

ORDERING EXAMPLES

SC	E	238	D	001	230V / 50 Hz
SC	E	238	D	008	V 115V / 50 Hz
SC	E	238	D	004	E 24V / DC
SC	G	238	F	016	230V / 50 Hz

prefix — pipe thread — basic number — voltage — suffix

ORDERING EXAMPLES KITS

C131600 ⁽²⁾	
C131618	V
C140262	E

basic number — suffix

DIMENSIONS(mm), WEIGHT(kg)



TYPE 01
Prefix "SC" Solenoid
Epoxy moulded
IEC 335 / DIN 43650
IP65

SCE238D001/002/004/005
SCE238D003




TYPE 02
Prefix "SC" Solenoid
Epoxy moulded
IEC 335 / ISO 4400
IP65

SCE238D006/007/009/010
SCE238D008
SCG238D414/415/416/417



TYPE 03
Prefix "SC" Solenoid
IEC 335 / ISO 4400
IP65

SCG238F016/017/018
SCG238F019/020/021

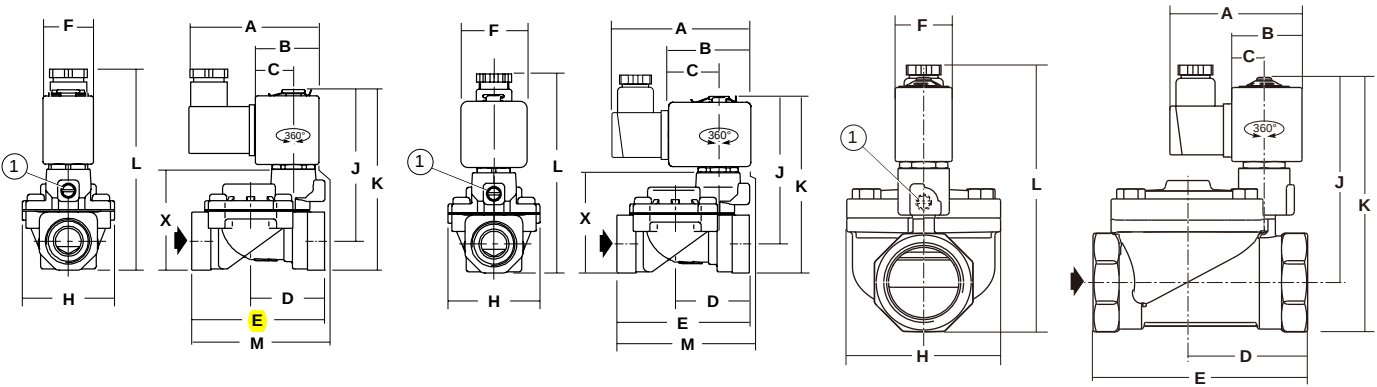

① Manual operator location

Type	Prefix Option	Catalog Number	A	B	C	D	E	F	H	J	K	L	M	X	Weight ⁽³⁾
01	SC	SCE238D001/002	60.5	27.5	17	34.5	62	22	43	68.5	81	98	57.5	47	0.4
		SCE238D003	60.5	27.5	17	45.5	81.5	22	57	71	83.5	100	73.5	49.5	0.5
		SCE238D004	60.5	27.5	17	53	95	22	68	79.5	94.5	111	85.5	60.5	0.8
		SCE238D005	60.5	27.5	17	58	105.5	22	87	84.5	104	121	93	70	1.0
02	SC	SCE238D006/007	76	38	23	34.5	62	30	43	69.5	83	100.5	61.5	47	0.5
		SCE238D008	76	38	23	45.5	81.5	30	57	72	85.5	103	77.5	49.5	0.6
		SCE238D009	76	38	23	53	95	30	68	80.5	96.5	114	89.5	60.5	0.9
		SCE238D010	76	38	23	58	105.5	30	87	85.5	106	123.5	97	70	1.1
		SCG238D414	76	38	23	34.5	60	30	40	67	78	95.5	60.2	-	0.32
		SCG238D415	76	38	23	37	66	30	40	69	83	100.5	63.7	-	0.38
		SCG238D416	76	38	23	43.5	79	30	50	73.5	90	107.5	74.7	-	0.52
		SCG238D417	76	38	23	59	105	30	71	86	107	124.5	88.7	-	1.08
03	SC	SCG238F016/019	76	41.5	21.6	63	113	30	81	108	134	150	-	-	1.7
		SCG238F017/020	76	41.5	21.6	76	140	30	110	112	142	157	-	-	2.6
		SCG238F018/021	76	41.5	21.6	85	157	30	110	116	152	168	-	-	2.9

⁽³⁾ Incl. coil(s) and connector(s).